



# Gap Architecture Wedge Wire Grille 22GA

## Profile 22GA

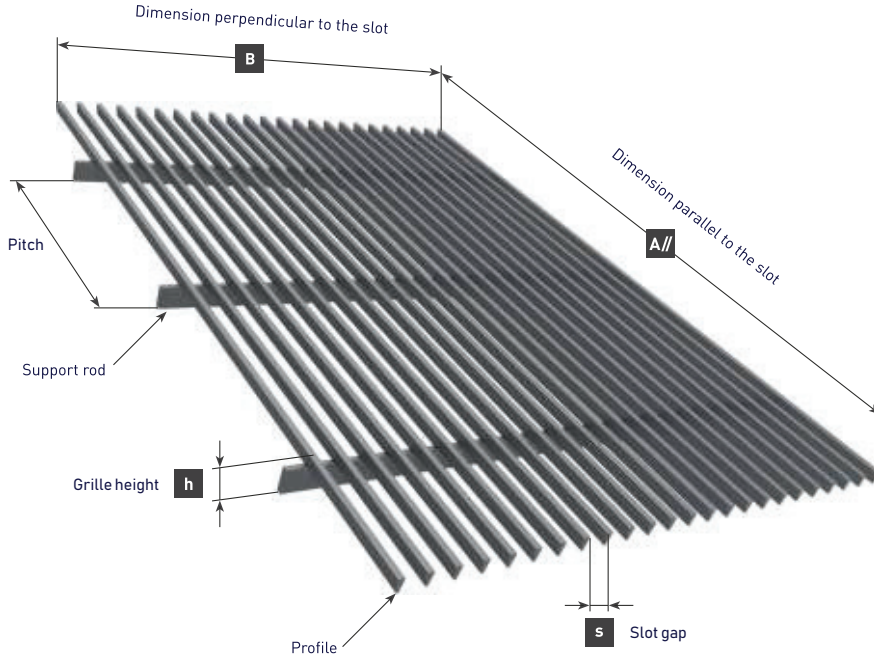

unit of measurement: [mm]  
scale: 2.5:1

## Applications

- Ceilings
- Balustrades
- Fencing
- Ventilation
- Walls
- Heating covers

### Standard variations of manufacturing (Wedge Wire Grille)

Basic parameters				Pitch 50			Pitch 70	Pitch 100			Pitch 125	Pitch 200		
Grille height [mm]	Material	Slot gap [mm]	Support rod [mm]	Max. dimension* A//xB [mm]	Basic parameters			Max. dimension* A//xB [mm]	Max. dimension* A//xB [mm]	Basic parameters			Max. dimension* A//xB [mm]	Max. dimension* A//xB [mm]
					s [mm]	Weight [kg/m <sup>2</sup> ]	Open area [%]			s [mm]	Weight [kg/m <sup>2</sup> ]	Open area [%]		
11.9	Special grade	5-30	8.4x2	3000//x4000 6000//x1600	10	7.14	81.9%	1400//x3800 6000//x1600	3000//x4000 6000//x1600	10	5.82	81.9%	2500//x3800	6000//x1600
					15	5.88	87.2%			15	4.56	87.2%		
					20	5.11	90%			20	3.79	90%		
8.5	Special grade	5-30	22GA	3000//x4000	10	5.6	81.9%	1400//x3800	3000//x4000	10	5.06	81.9%	2500//x3800	2500//x3800
					15	4.34	87.2%			15	3.79	87.2%		
					20	3.57	90%			20	3.02	90%		

\*Dimensions stated above are maximum manufacturing dimensions and do not take into account straightening and cutting.  
Manufacturing tolerances: straightness +/- 3 mm/rm; flatness +/- 3 mm/rm; diagonals +/- 2 mm/rm