



Gap Architecture Wedge Wire Grille 34GA

Profile 34GA

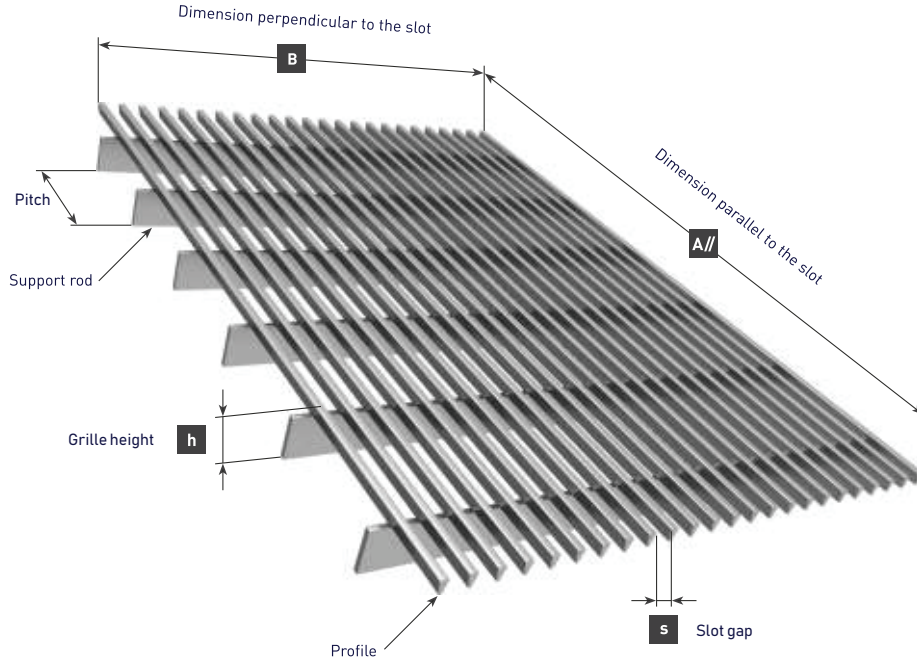

unit of measurement: [mm]
scale: 2.5:1

Applications

- Facades
- Balustrades
- Drainage
- Floors

Standard variations of manufacturing (Wedge Wire Grille)

Basic parameters				Pitch 50			Pitch 70	Pitch 100			Pitch 125	Pitch 200		
Grille height [mm]	Material	Slot gap [mm]	Support rod [mm]	Max. dimension* A//xB [mm]	Basic parameters			Max. dimension* A//xB [mm]	Max. dimension* A//xB [mm]	Basic parameters			Max. dimension* A//xB [mm]	Max. dimension* A//xB [mm]
					s [mm]	Weight [kg/m ²]	Open area [%]			s [mm]	Weight [kg/m ²]	Open area [%]		
13.5	Stainless steel	2-15 (5-15)	10x2	3000//x4000 (6000//x1600)	5	12.87	64.1%	1400//x3800 (6000//x1600)	3000//x4000 (6000//x1600)	5	11.27	64.1%	2500//x3800 (6000//x1600)	2500//x3800 (6000//x1600)
					8	10.22	74%			10	7.49	78.1%		
					12	8.34	81%			-	-	-		
18.5	Stainless steel	2-15 (5-15)	15x2	3000//x4000 (6000//x1600)	5	14.47	64.1%	1400//x3800 (6000//x1600)	3000//x4000 (6000//x1600)	-	-	-	2500//x3800 (6000//x1600)	2500//x3800 (6000//x1600)
					8	11.82	74%			-	-	-		
					12	9.94	81%			-	-	-		
8.5	Stainless steel	2-15	Q35	3000//x4000	5	11.57	64.1%	2000//x2000 1400//x3800	3000//x4000	-	-	-	2500//x3800	2000//x2000
					8	8.93	74%			-	-	-		
					12	7.04	81%			-	-	-		
11.5	Stainless steel	2-15	Q55	3000//x4000	5	13.45	64.1%	1400//x3800	3000//x4000	-	-	-	2500//x3800	2000//x2000
					8	10.8	74%			-	-	-		
					12	8.91	81%			-	-	-		

*Dimensions stated above are maximum manufacturing dimensions and do not take into account straightening and cutting.
Manufacturing tolerances: straightness +/- 3 mm/rm; flatness +/- 3 mm/rm; diagonals +/- 2 mm/rm