



Gap Architecture Wedge Wire Grille 42SGA

Profile 42SGA

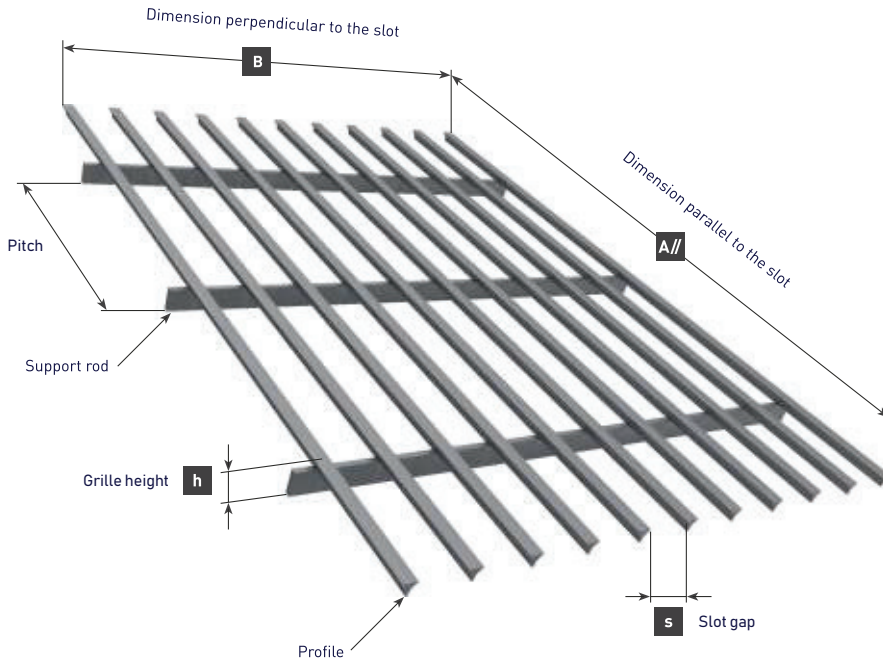

unit of measurement: [mm]
scale: 2.5:1

Applications

- Facades
- Ceilings
- Balustrades
- Fencing
- Drainage
- Ventilation
- Floors
- Walls
- Heating covers

Standard variations of manufacturing (Wedge Wire Grille)

Basic parameters				Pitch 50			Pitch 70	Pitch 100			Pitch 125	Pitch 200		
Grille height [mm]	Material	Slot gap [mm]	Support rod [mm]	Max. dimension* A//xB [mm]	Basic parameters			Max. dimension* A//xB [mm]	Max. dimension* A//xB [mm]	Basic parameters			Max. dimension* A//xB [mm]	Max. dimension* A//xB [mm]
					s [mm]	Weight [kg/m ²]	Open area [%]			s [mm]	Weight [kg/m ²]	Open area [%]		
11.5	Special grade	5-50	8.4x2	3000//x4000 6000//x1600	10	7.98	68%	1400//x3800 6000//x1600	3000//x4000 6000//x1600	10	6.66	68%	2500//x3800	6000//x1600
					15	6.65	76.1%			15	5.33	76.1%		
					20	5.86	80.9%			20	4.54	80.9%		

*Dimensions stated above are maximum manufacturing dimensions and do not take into account straightening and cutting.
Manufacturing tolerances: straightness +/- 3 mm/rm; flatness +/- 3 mm/rm; diagonals +/- 2 mm/rm