




Gap Architecture Wedge Wire Grille 50GA

Profile **50GAB**

Profile **50GA**

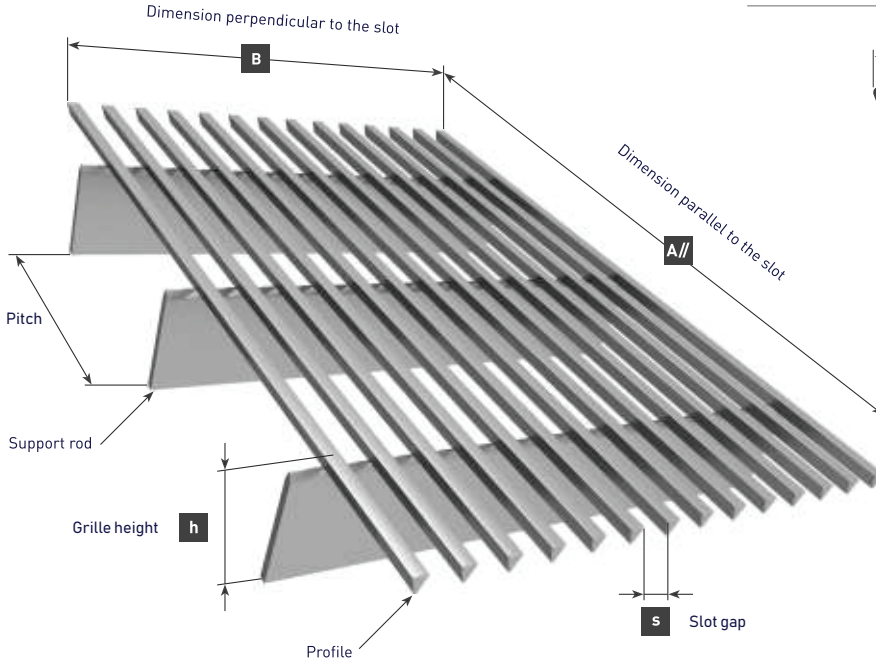

unit of measurement: [mm]
scale: 2.5:1

Applications

- Ceilings
- Balustrades
- Fencing
- Drainage
- Floors

Standard variations of manufacturing (Wedge Wire Grille)

Basic parameters				Pitch 50			Pitch 70	Pitch 100			Pitch 125	Pitch 200		
Grille height [mm]	Material	Slot gap [mm]	Support rod [mm]	Max. dimension* A//xB [mm]	Basic parameters			Max. dimension* A//xB [mm]	Max. dimension* A//xB [mm]	Basic parameters			Max. dimension* A//xB [mm]	Max. dimension* A//xB [mm]
					s [mm]	Weight [kg/m ²]	Open area [%]			s [mm]	Weight [kg/m ²]	Open area [%]		
14,5	Stainless steel	5-10	10x2	3000//x4000 6000//x1600	5	17.4	50%	1400//x3800 6000//x1600	3000//x4000 6000//x1600	5	15.8	50%	2500//x3800	6000//x1600
					-	-	-			7	13.39	58.3%		
					-	-	-			-	-	-		
24,5	Stainless steel	5-15	20x2	3000//x4000 6000//x1600	8	17.33	61.5%	1400//x3800 6000//x1600	3000//x4000 6000//x1600	8	14.13	61.5%	2500//x3800	6000//x1600
					10	15.91	66.6%			10	12.71	66.6%		
					12	14.78	70.6%			12	11.58	70.6%		
42,5	Stainless steel	5-15	38x3	3000//x4000 6000//x1600	8	29.17	61.5%	1400//x3800 6000//x1600	3000//x4000 6000//x1600	8	20.05	61.5%	2500//x3800	6000//x1600
					10	27.75	66.6%			10	18.63	66.6%		
					12	26.62	70.6%			12	17.5	70.6%		
44,5	Stainless steel	5-20	40x3	6000//x1600	8	30.13	61.5%	6000//x1600	3000//x4000 6000//x1600	8	20.53	61.5%	6000//x1600	6000//x1600
					10	28.71	66.6%			10	19.11	66.6%		
					12	26.3	70.6%			12	17.98	70.6%		

*Dimensions stated above are maximum manufacturing dimensions and do not take into account straightening and cutting.
Manufacturing tolerances: straightness +/- 3 mm/rm; flatness +/- 3 mm/rm; diagonals +/- 2 mm/rm