



Gap Architecture Wedge Wire Grille 8GA

Profile 8GA

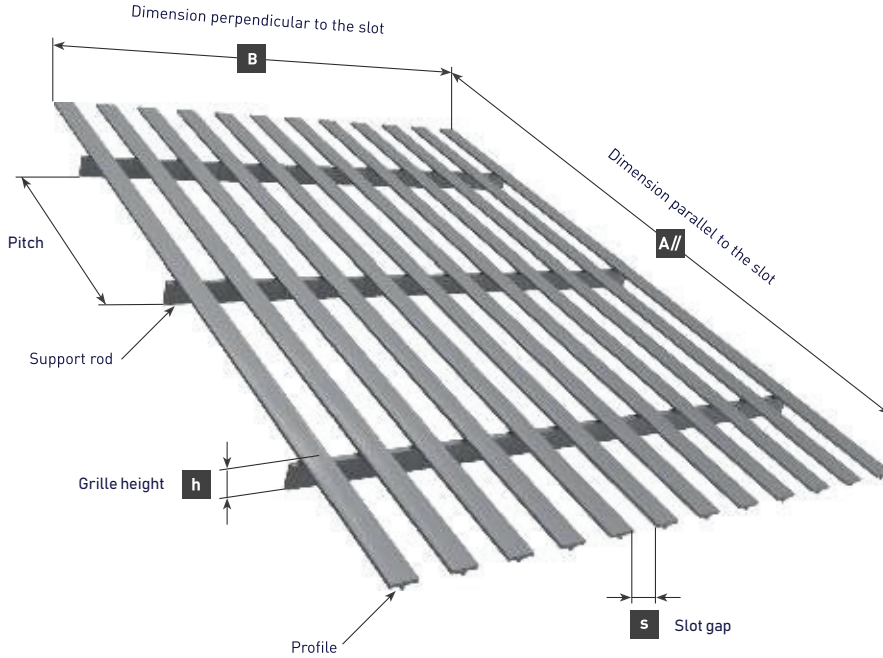

unit of measurement: [mm]
scale: 2.5:1

Applications

- Facades
- Ceilings
- Balustrades
- Fencing
- Walls
- Heating covers

Standard variations of manufacturing (Wedge Wire Grille)

Basic parameters				Pitch 50	Pitch 70	Pitch 100			Pitch 125	Pitch 200	
Grille height [mm]	Material	Slot gap [mm]	Support rod [mm]	Max. dimension* A//xB [mm]	Max. dimension* A//xB [mm]	Max. dimension* A//xB [mm]	Basic parameters			Max. dimension* A//xB [mm]	Max. dimension* A//xB [mm]
							s [mm]	Weight [kg/m ²]	Open area [%]		
10.2 +/-0.3	Special grade	5-50	8.4x2	1000//x3800 6000//x2000	1400//x3800 6000//x2000	2000//x3800 6000//x2000	5	10.07	37%	2500//x3800 6000//x2000	6000//x2000
							12	7.11	58.5%		
							20	5.46	70%		
10.2 +/-0.3	Carbon steel	5-50	10x2	1000//x3800 6000//x2000	1400//x3800 6000//x2000	2000//x3800 6000//x2000	5	10.32	37%	2500//x3800 6000//x2000	6000//x2000
							12	7.36	58.5%		
							20	5.71	70%		

*Dimensions stated above are maximum manufacturing dimensions and do not take into account straightening and cutting.
Manufacturing tolerances: straightness +/- 3 mm/rm; flatness +/- 3 mm/rm; diagonals +/- 2 mm/rm